




FEATURES

- RDL9700C 7" Driving Light Kit with harness
- Amber or White dynamic start-up DRL
- Blackout mounting hardware
- Includes black cover with DRL windows
- 8 × 18W + 8 × 4W LEDs with a crisp 6000K colour temperature
- 14,480 lumens per set
- 1LX @ 900 metres per set
- Multi-volt 10–30V DC input with low current draw
- 50,000-hour LED lifespan with solid-state technology
- Thermal Management Technology
- Lightweight, tough die-cast aluminium housing and polycarbonate lens
- Water and dust proof IP68 – IP69K rated
- Over/under-voltage and reverse polarity protection
- EMI/EMC radio interference approved

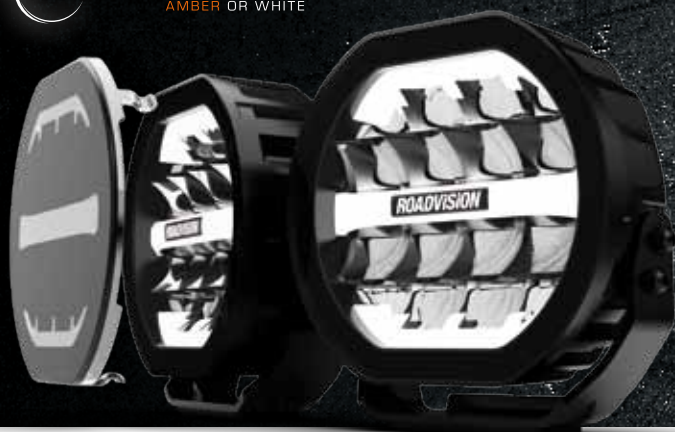


Enhance your vehicle's lighting with the Roadvision HLX Series 7" LED Driving Lights. Compact, stylish and built for real-world use, the HLX delivers a premium look with simple, DIY-friendly installation. The dual colour dynamic start-up DRL gives your vehicle a modern visual signature while improving daytime visibility, and the included harness ensures a clean, straightforward fit. With 14,480 lumens per set and a long-range 1LX at 900 metres, the HLX provides clear, confident lighting for both highway driving and off-road touring. Its crisp 6000K colour temperature, high-output LED array and Thermal Management Technology deliver reliable performance and long service life. Designed for Australian conditions, the HLX7 features a tough die-cast aluminium housing, polycarbonate lens and IP68/IP69K sealing. Each light includes blackout mounting hardware and a protective cover with DRL windows, offering durability, reliability and style in a compact package.

PART NUMBERS



RDL9700CD

7" LED Driving Light 10-30V 8x18W + 8x4W 132W 7240lm IP69K
Combo Beam + Dynamic DRL

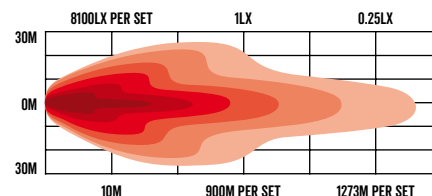

SPECIFICATIONS	RDL9700CD
BEAM PATTERN	Combination
MAXIMUM LUMENS	14,480lm Per Set
MAXIMUM LUX @ 10M	8,100lx Per Set
BEAM DISTANCE @ 1LX	900m Per Set
BEAM DISTANCE @ 0.5LX	1,273m Per Set
INPUT VOLTAGE	10-30 VDC
MAXIMUM WATTS	264W
NUMBER OF LEDS	8 x 18W + 8 x 4W Each
CURRENT DRAW @ 13.8V	22 Amps Per Set
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Aluminium
DIMENSIONS AXBXC	178 x 76 x 184mm
WIRING	6 PIN Deutsch Plug Harness supplied

LINE DIAGRAM

