



FEATURES

- RDL9900 9" Driving Light Kit with harness
- Amber or White dynamic start-up DRL
- Blackout mounting hardware
- Includes black cover with DRL windows
- 8 x 18W + 12 x 4W LEDs with a crisp 6000K colour temperature
- 19,430 lumens per set
- 1LX @ 1273 metres per set
- Multi-volt 10–30V DC input with low current draw
- 50,000-hour LED lifespan with solid-state technology
- Thermal Management Technology
- Lightweight, tough die-cast aluminium housing and polycarbonate lens
- Water and dust proof IP68 – IP69K rated
- Over/under-voltage and reverse polarity protection
- EMI/EMC radio interference approved

LED DRIVING LAMPS




Upgrade your vehicle's lighting with the Roadvision HLX Series 9" LED Driving Lights. Designed for customers who want a premium look without the complexity, the HLX delivers modern styling, serious output and true DIY-ready convenience. The dualcolour dynamic start-up DRL adds a sharp visual signature while improving daytime visibility, and the included wiring harness makes installation straightforward for touring rigs and modern 4WD builds. Producing 19,430 lumens per set with a long-range 1LX at 1273 metres, the HLX provides confident visibility on open roads and rugged tracks. Its crisp 6000K colour temperature, high-output LED array and Thermal Management Technology ensure strong performance and long service life. Built for Australian conditions, it features a lightweight die-cast aluminium housing, polycarbonate lens and IP68/IP69K protection. Each light includes blackout mounting hardware and a protective cover with DRL windows, combining durability, reliability and style in one sleek package.

PART NUMBERS



RDL9900CD

9" LED Driving Light 10-30V 8x14W 148W 9715lm IP69K
Combo Beam + Dynamic DRL

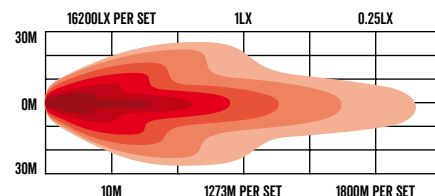

SPECIFICATIONS	RDL9900CD
BEAM PATTERN	Combination
MAXIMUM LUMENS	19,430lm Per Set
MAXIMUM LUX @ 10M	16,200lx Per Set
BEAM DISTANCE @ 1LX	1,273m Per Set
BEAM DISTANCE @ 0.5LX	1,800m Per Set
INPUT VOLTAGE	10-30 VDC
MAXIMUM WATTS	288W
NUMBER OF LEDS	8 x 18W + 12 x 4W Each
CURRENT DRAW @ 13.8V	24 Amps Per Set
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Aluminium
DIMENSIONS AXBXC	228 x 92.5 x 235mm
WIRING	6 PIN Deutsch Plug Harness supplied

LINE DIAGRAM

