
WELDEX
LED Lighting

WELDEX CORPORATION

WDBL-90R75WBL

75 Watts LED Beacon



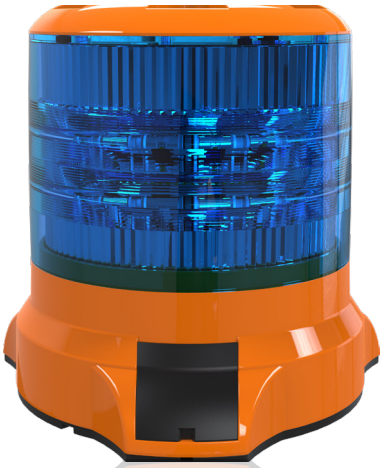

Features

- Five different rotating & flashing patterns
- Circular LED discs for intense, 360° visible light output
- Impact-resistant PC lens system
- Heavy-duty cast alloy base & cap for mechanical strength & vibration resistance
- Low current draw
- Multi-stage paint coating for UV & corrosion protection
- Fully sealed & pre-wired to prevent dirt & moisture

Specification

Wattage	Input voltage	IP rating
75W	DC 9~36V	IP69K

Operating temperature	Frequency rotating
120 cycles/min.	-40°C ~ +80°C

LED Color	Vibration rating	Flash
Cool white	60G	72 fpm(quad)

Light color	LED lifetime	Weight
Amber	50,000 Hours	1.4kg

Cable Reference

P: pole mounting / M: magnet mounting / S: surface mounting

Connector

W: leadwire / C: cigar jack

Pattern

Flash or Rotary

Dimensions

[Unit : mm]

