




PORTABLE Solar Panel

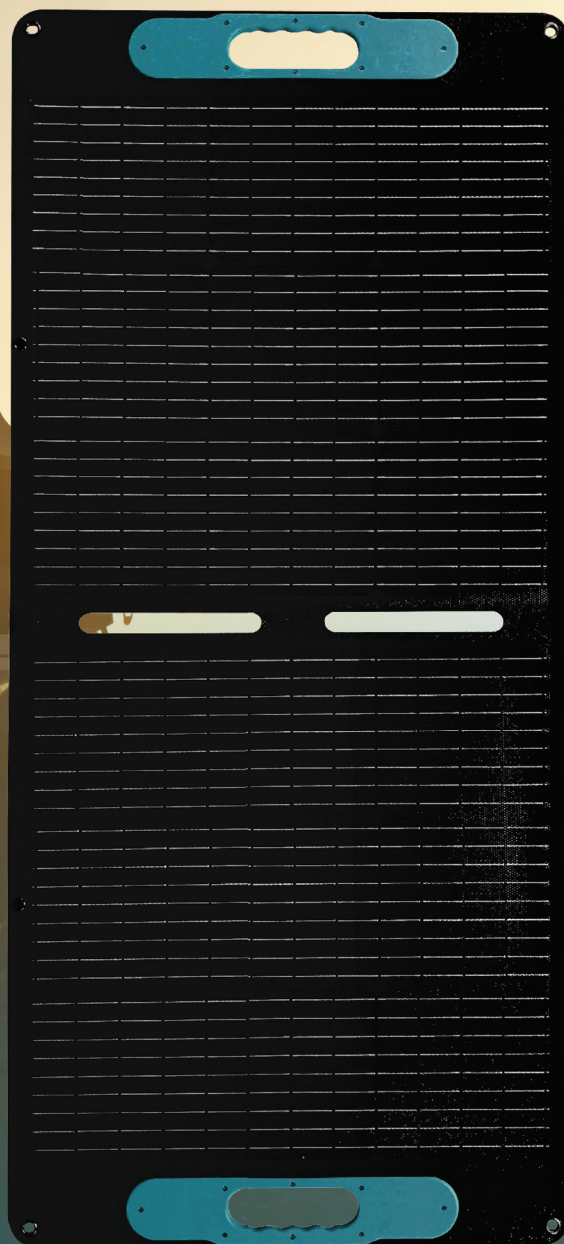


ENERGY ANYWHERE

Solar Panel user manual



RM- 100PSP PORTABLE SOLAR PANEL

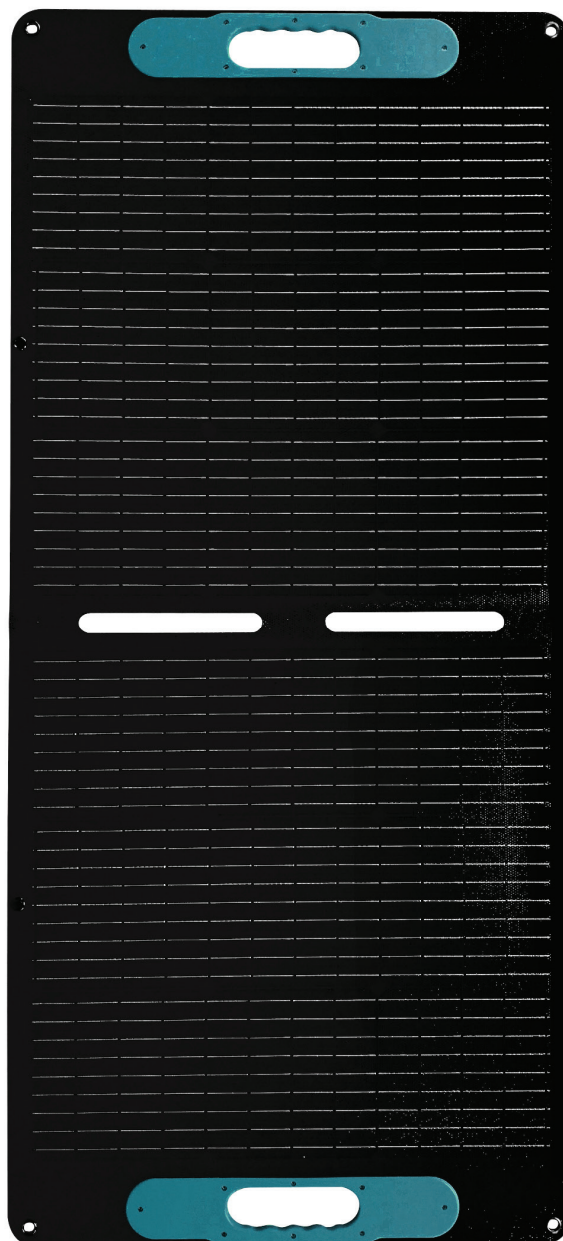

Solar Panel user manual

1. Safety Guidelines

Please read these safety guidelines before using your new solar panel

- **Water Resistance:** While this product is designed to be water resistant and can withstand light rain, **DO NOT** immerse fully in water.
- **Weather Precautions:** **DO NOT** operate the solar panel during severe weather conditions, such as thunderstorms, strong winds, heavy rain or hailstorms.
- **Avoid Physical Damage:** **DO NOT** pierce or damage the solar panel cells. For optimal efficiency, ensure the panel is positioned perpendicular to the sunlight during use.
- **Keep Away from Corrosives:** **AVOID** contact with strong corrosive substances.
- **Battery Charging Warning:** **DO NOT** connect the solar panel directly to an automotive battery.


2. Specifications

Technical Data	
Peak Power	100W
Open Circuit Voltage	24V
Max Power Voltage	20V
Short Circuit Current	5.25A
Max Power Current	5A
Efficiency	22%
Cell Type	Monocrystalline silicon
Connector Type	50Amp connector
Operating & Storage Temperature	-40°F to 185°F(-40°C to 85°C)
Power Chargers number	50W*2pcs
General Info	
Net weight	9.8 lbs(4.45kg)
Unfolded Dimensions	48.43*22.05*1 in(123.0*56.0*25cm)
Folded Dimensions	24.21*22.05*1.78in(61.5*56.0*3.5cm)

3. Charging instruction

1. Connect the power charger 50Amp Connectors to the Solar Charging Cable;
2. Connect the DC connector on the Solar Charging Cable to the DC Input port on the portable power station.

Note: REMCO Portable Power Station with inbuilt MPPT Solar charge controller, can be connected to the solar panel directly by a 50A connector solar charge cable (supplied with power station).

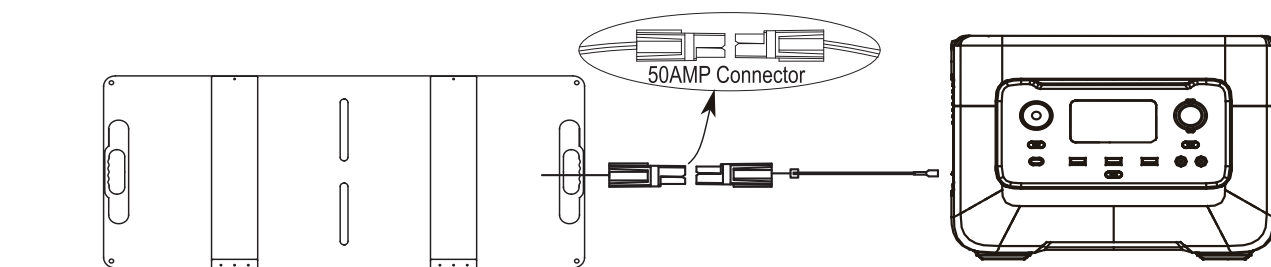

Solar Panel user manual



Warranty

For warranty information, terms and conditions please consult website:

www.remcoenergy.com.au

Contact Us

Website: www.remcoenergy.com.au

Remco Customer Support email: customersupport@remcoenergy.com.au