

## Single Function Lamps Medium Vehicle/Trailer

- Recessed lamp low profile
- Shock, dust & water proof
- 5 Year warranty



### Part Number

**380R12** - 12 Volt, Blister single

**380R24** - 24 Volt, Blister single

|                 |                    |
|-----------------|--------------------|
| <b>Function</b> | Stop/Tail          |
| <b>Size</b>     | 382mm x 25mm x 3mm |
| <b>Voltage</b>  | 12 Volt or 24 Volt |
| <b>LED Qty</b>  | 18                 |
| <b>Cable</b>    | 40cm cable         |

| Draw          | Stop  | Tail  |
|---------------|-------|-------|
| <b>@13.8V</b> | 0.16A | 0.04A |
| <b>@28V</b>   | 0.12A | 0.01A |

| Approvals  | Function | Category | CRN   |
|------------|----------|----------|-------|
| <b>ADR</b> | Stop     | 49/00    | 39473 |
| <b>ADR</b> | Tail     | 49/00    | 39473 |



### Part Number

**380A12** - 12 Volt, Blister single

**380A24** - 24 Volt, Blister single

|                 |                    |
|-----------------|--------------------|
| <b>Function</b> | Rear Indicator     |
| <b>Size</b>     | 382mm x 25mm x 3mm |
| <b>Voltage</b>  | 12 Volt or 24 Volt |
| <b>LED Qty</b>  | 18                 |
| <b>Cable</b>    | 40cm cable         |

| Draw          | Indicator |
|---------------|-----------|
| <b>@13.8V</b> | 0.18A     |
| <b>@28V</b>   | 0.10A     |

| Approvals  | Function  | Category | CRN   |
|------------|-----------|----------|-------|
| <b>ADR</b> | Indicator | 6/00/2A  | 39470 |



### Part Number

**380W12** - 12 Volt, Blister single

**380W24** - 24 Volt, Blister single

|                 |                       |
|-----------------|-----------------------|
| <b>Function</b> | Supplementary reverse |
| <b>Size</b>     | 382mm x 25mm x 3mm    |
| <b>Voltage</b>  | 12 Volt or 24 Volt    |
| <b>LED Qty</b>  | 18                    |
| <b>Cable</b>    | 40cm cable            |


| Draw          | Reverse |
|---------------|---------|
| <b>@13.8V</b> | 0.14A   |
| <b>@28V</b>   | 0.09A   |

| Approvals  | Function | Category | CRN |
|------------|----------|----------|-----|
| <b>ADR</b> | Non ADR  | N/A      | N/A |

## Fitting Instructions

Mount onto flat surface horizontally. Push lamp and grommet into cutout (cut out 203mm x 19mm) in mounting surface, run wires through back and fix with screws supplied at both ends. Please refer to ADR13/00 for mounting instructions.

## Technical Drawings

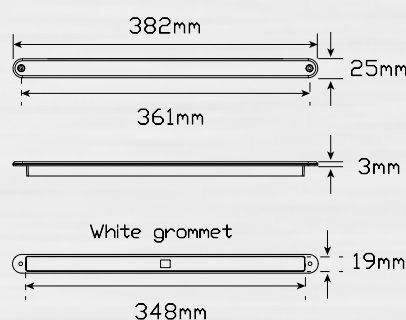

## Blister Packs

