

3 WAY WATERPROOF MIDI FUSE HOLDER


- Voltage: up to 58V
- Current: 200A max.
- Stud terminal: M5
- Housing material: PA66+GF30
- Busbar material: Stainless steel
- Stud material: Stainless steel
- Seals & cavity plugs included
- Operating temperature: -40°C to 85°C
- IP rating: IP67/IP69K
- Marine applications
- Dimensions: 84.4(W) x 131.35(L) x 33.1(H)mm

PRODUCT INFORMATION

Part No.	Qty
LV5411	1



SINGLE PACK

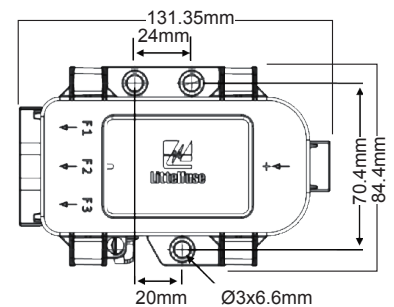

4 WAY MIDI FUSE HOLDER


- Voltage: up to 58V
- Current: 220A max.
- Stud terminal: M6
- Housing material: PA66+GF30
- Busbar material: Tin plated copper
- Stud material: Zinc plated steel
- Hinged cover
- Operating temperature: -40°C to 125°C

PRODUCT INFORMATION

Part No.	Qty
LV5318	1



SINGLE PACK



7 WAY MIDI FUSE HOLDER WITH MAIN MEGA FUSE


- Voltage: up to 58V
- Current: 150A/cct
- Stud terminal: M6
- Housing material: PA66+GF30
- Busbar material: Copper alloy
- Stud material: Zinc plated steel
- Mounting hole: 8mm
- Operating temperature: -40°C to 125°C
- Dimensions: 109(W) x 165(L) x 36(H)mm

PRODUCT INFORMATION

Part No.	Qty
LV5384	1



SINGLE PACK

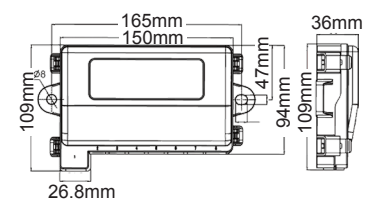

3 WAY FUSED BATTERY DISTRIBUTION FITS POSITIVE BATTERY POST

- Voltage: up to 58V
- Current: 750A max.
- Stud terminal: 2 x M8 & 4 x M5
- Housing material: PA66
- Busbar material: Zinc plated steel
- Stud material: Zinc plated steel
- Fuses to suit: 2 x midi & 1 x mega
- Ideal for dual battery systems
- Operating temperature: -40°C to 125°C
- Applications: 4WD; motorhomes

PRODUCT INFORMATION

Part No.	Qty
LV5480	1



SINGLE PACK

