



FEATURES

- LED utility lighting range suitable for interior or exterior applications
- Amber-white illumination in one light
- 3 size options available
- 12V DC Input
- High performance light output up to 757lm
- 100,000 hour rated LED lifespan with solid state technology
- Last function memory
- Polycarbonate lens and durable aluminium housing
- Water and dust proof IP68, IP69K rated
- Integrated On/Off switch with dimmable function
- Simple Surface mount



12 VDC



POLYCARB LENS



CAST ALLOY HOUSING



90° BEAM ANGLE



IP68 IP69K



WHITE AMBER LED



5 YEAR WARRANTY

Discover ROADVISION's innovative dimmable amber/white LED utility lamp series, engineered to deliver powerful, reliable lighting wherever you need it. Designed for canopies, cabins, caravans, marine environments, and outdoor camping areas, this versatile range is available in three size options to suit any setup. The 4500K white mode provides crisp, bright illumination for maximum visibility, while the amber mode enhances outdoor ambience and helps reduce insect attraction—ideal for camping and evening use. Each unit features last-function memory, smooth dimming control, an integrated switch, and a tough polycarbonate lens paired with a durable aluminium housing. Fully sealed to IP68 and IP69K standards, these lamps are built for both indoor and outdoor use, delivering long-lasting performance even in the harshest environments.

PART NUMBERS



IL72AWD

LED Interior Lamp 12V White/Amber Flood Beam Dimmable With Switch



IL120AWD

LED Interior Lamp 12V White/Amber Flood Beam Dimmable With Switch



IL180AWD

LED Interior Lamp 12V White/Amber Flood Beam Dimmable With Switch


SPECIFICATIONS	IL72AWD	IL120AWD	IL180AWD
LUMENS WHITE	530lm	560lm	757lm
LUMENS AMBER	250lm	470lm	645lm
INPUT VOLTAGE	12VDC	12VDC	12VDC
NUMBER OF LEADS	Amber 3, White 3	Amber 12, White 12	Amber 27, White 27
CURRENT DRAW @ 13.8V	0.3A @ 13.8V	0.38A @ 13.8V	0.45A @ 13.8V
LENS CONSTRUCTION	Polycarbonate	Polycarbonate	Polycarbonate
HOUSING CONSTRUCTION	Cast Aluminium	Cast Aluminium	Cast Aluminium
COLOUR TEMP WHITE	4500K	4500K	4500K
COLOUR TEMP AMBER	1600K	1600K	1600K
DIMENSIONS AXBXC	72 x 14 x 39mm	120 x 14 x 39mm	180 x 14 x 39mm
WIRING	380mm Lead	380mm Lead	380mm Lead

OPERATING INSTRUCTIONS


- On/Off - Press Switch Momentarily to Cycle Through White/Amber/Off
- Dimming - Press & Hold Switch to Adjust Brightness



LINE DIAGRAM - IL72AWD

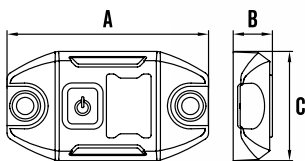

LINE DIAGRAM - IL120AWD

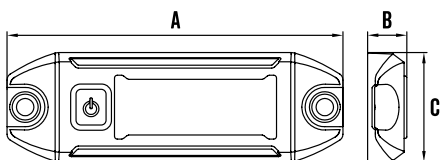

LINE DIAGRAM - IL180AWD

